


BRONZE 120 PL

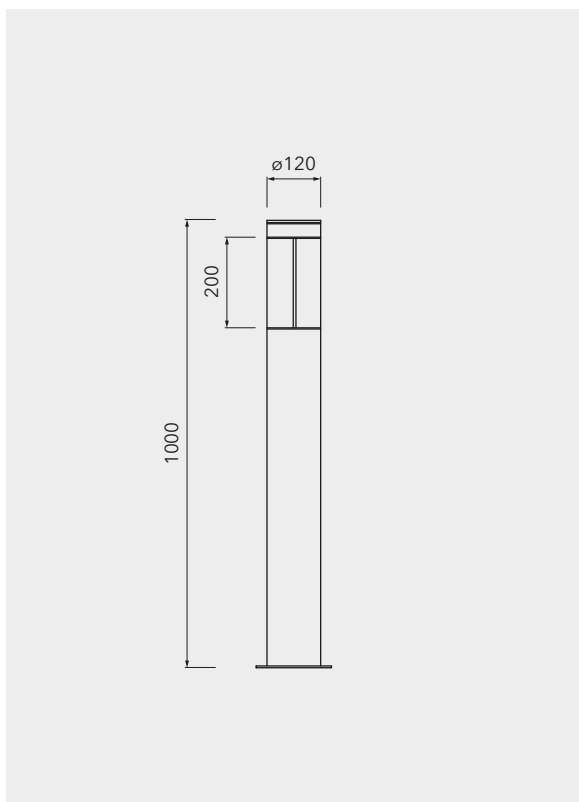

MATERIAL

- Bronzepole Ø 120mm
- Luminaire glasse made of PMMA, clear or satinised

● Bronze burnished

TECHNICAL DATA

- with satinised luminaire glass: LED module type BLF 110-12
with PMMA lenses for symmetrical or asymmetrical light distribution
- Colour temperatur: 2200K | 2700K | 3000K |
optional: 1800K, 2200K, 4000K
- Power rating: 11,9W - 17,2W
- Rated luminous flux:

BLF 110-12 (350mA, sym.):	1240 Lumen
BLF 110-12 (350mA, asym.):	1371 Lumen
BLF 110-12 (500mA, sym.):	1772 Lumen
BLF 110-12 (500mA, asym.):	1869 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- mounting height = 0,60 m - 2,00 m;
earth section, flange plate
- terminal box

STANDARDS

⊕ | □ | CE | Housing IP65

CONSTRUCTION OPTIONS

A

LIGHT SPOTS

1a



BOLLARD LUMINAIRE

BRONZE 120 PL

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S



LUMINAIRE

Bronze bollard - customised design with clear luminaire glass