


PROFILLEUCHE MINI WL + DL

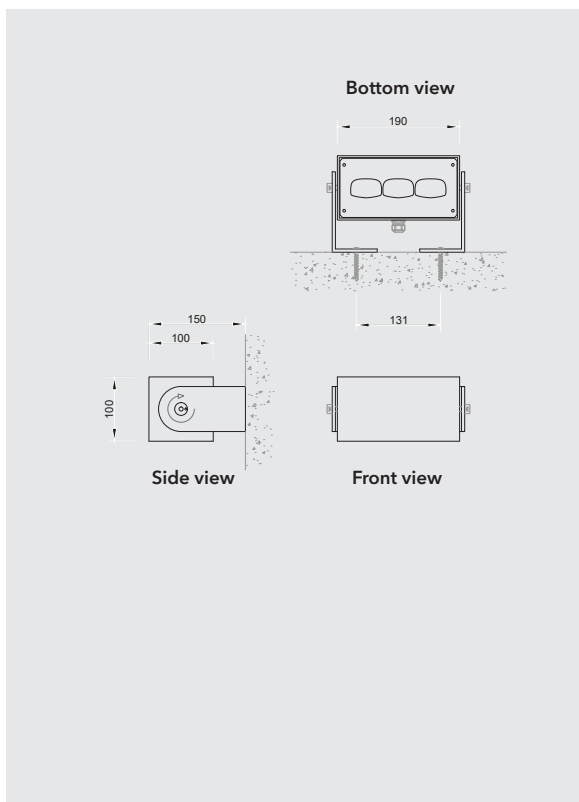

MATERIAL

- Housing: aluminium, lacquered
- Surface lacquered:
 - DB 703
 - DB 702
 - DB 701
 - Optional: Bronze brunished
 - Other colours available on request

TECHNICAL DATA

- LED module BLK3-3/5/6/8S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Power rating: 10W - 23W
- Rated luminous flux for 3000K, 350mA, 13,7W:

BLK3-3S (rectangular):	1671 Lumen
BLK3-5S (asym wide beam):	1598 Lumen
BLK3-6S (sym. wide beam):	1577 Lumen
BLK3-8S (asym. forward)	1482 Lumen
- EVG: LED-DALI-constant current driver (AstroDim, DALI), DC-tauglich

STANDARDS

⊕ | CE | Housing IP44 | LED module IP67

ACCESSORIES

- Wall mounting: bracket
- Ceiling mounting: without bracket

CONSTRUCTION OPTIONS

B C

LIGHT SPOTS

1a




WALL- AND CEILING LUMINAIRE

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

PROFILLEUCHTE MINI WL + DL

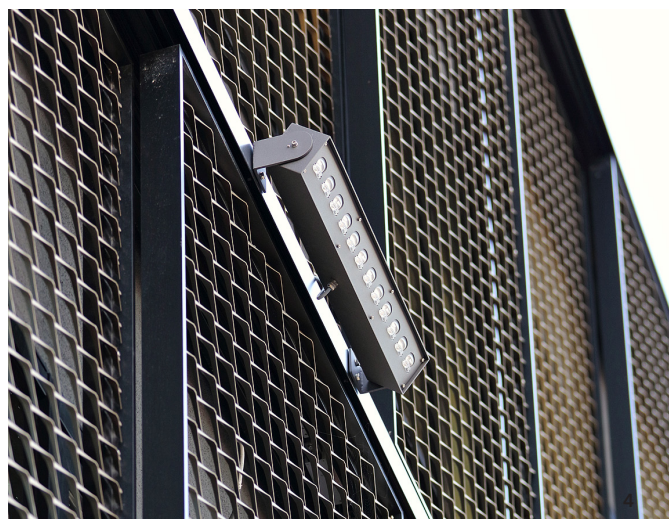

PROJECT DEMMELHUBER

Picture 1: Profilleuchte Midi

Picture 2: Profilleuchte Midi

Picture 3: Profilleuchte Midi

Picture 4: Profilleuchte Maxi