
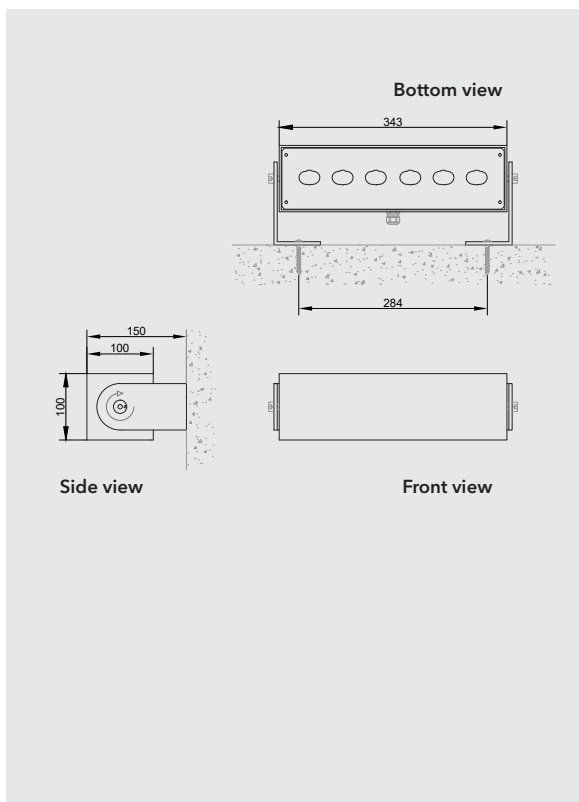


PROFILLEUCHE MIDL WL + DL

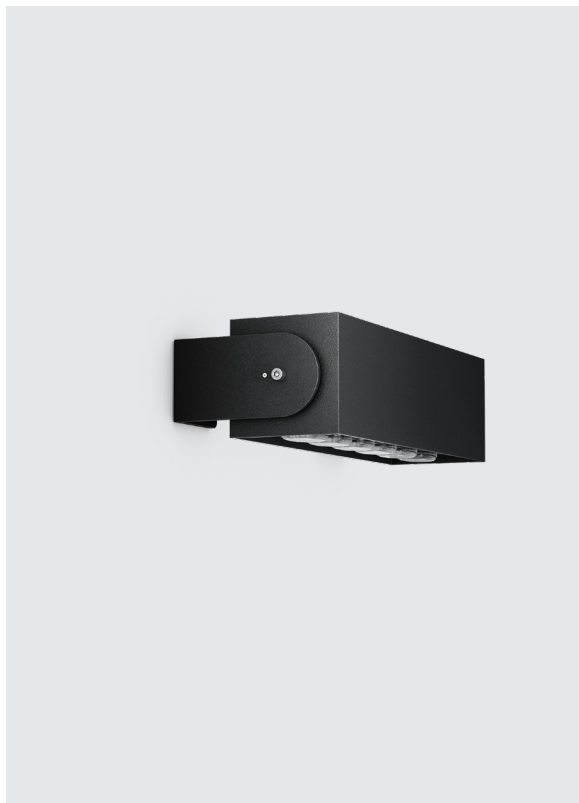

MATERIAL

- Housing: aluminium, lacquered
- Surface lacquered:
 - DB 703
 - DB 702
 - DB 701
 - Optional: Bronze brushed
 - Other colours available on request

TECHNICAL DATA

- LED module BLK6-1/3/4/5/6/7/8S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Power rating: 16,5W - 43,7W
- Rated luminous flux for 3000K, 350mA, 26,6W:
 - BLK6-3S (rectangular): 3156 Lumen
 - BLK6-6S (sym. wide beam): 3090 Lumen
- EVG: LED-DALI-constant current driver (AstroDim, DALI), DC-tauglich

STANDARDS

⊕ | CE | Housing IP44 | LED module IP67

ACCESSORIES

- Wall mounting: bracket
- Ceiling mounting: without bracket

CONSTRUCTION OPTIONS

B C

LIGHT SPOTS

1a




WALL- AND CEILING LUMINAIRE

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

PROFILLEUCHTE MIDI WL + DL

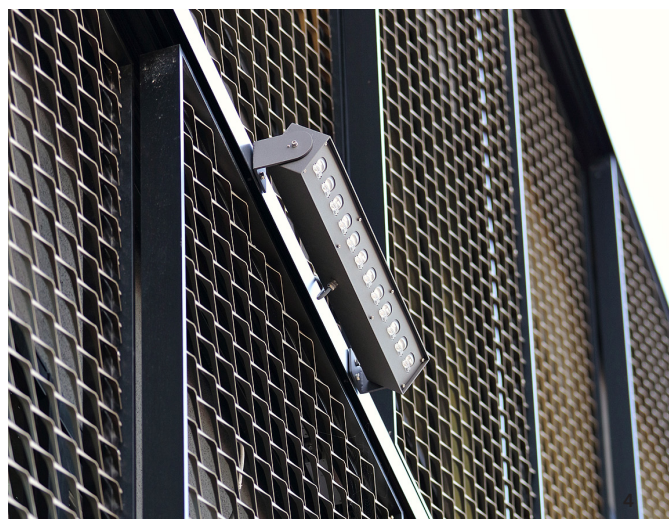

PROJECT DEMMELHUBER

Picture 1: Profilleuchte Midi

Picture 2: Profilleuchte Midi

Picture 3: Profilleuchte Midi

Picture 4: Profilleuchte Maxi