


BOLLARD LUMINAIRE

ANS 200 PL

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

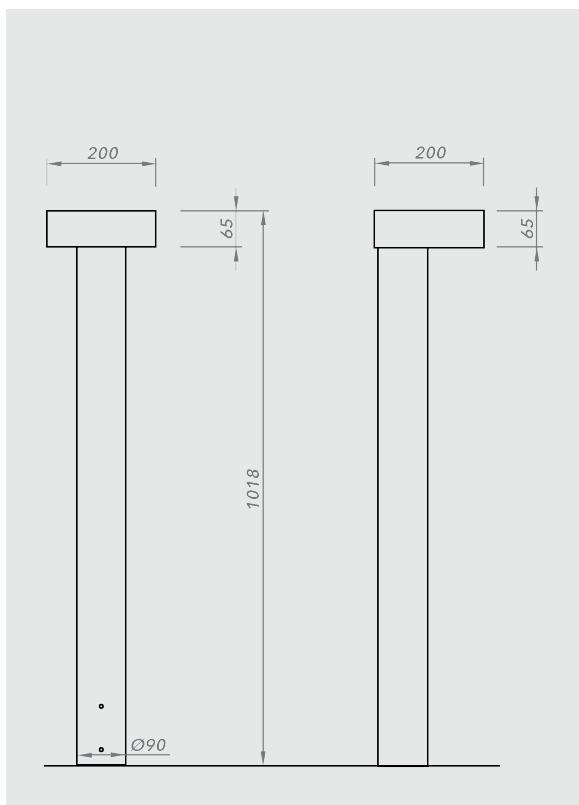

MATERIAL

- Housing made of aluminiumprofil Ø 200 h: 65mm
- Bottom cover: clear PMMA

Surface painted

- DB703
- DB702
- DB701
- Other colours upon request

TECHNICAL DATA

- LED module BLK1-4/8C or S
- Optics of PMMA, clear or satined
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Power rating: 4,3W - 7,8 W
- Rated luminous flux: (3000K)
 - BLK1-4C (asym. wide beam): max. 799 Lumen
 - BLK1-8C (asym. forward): max. 728 Lumen
- EVG: Constant current driver for LED modules, DALI dimmable; DC-compatible

ACCESSORIES

- separate earth piece with cable junction box
- other heights available on request

STANDARDS

⊕ | ☐ | CE | Housing IP54 | LED module IP67

CONSTRUCTION OPTIONS

A

LIGHT SPOTS

1a

