


PLANEA MIDI LS

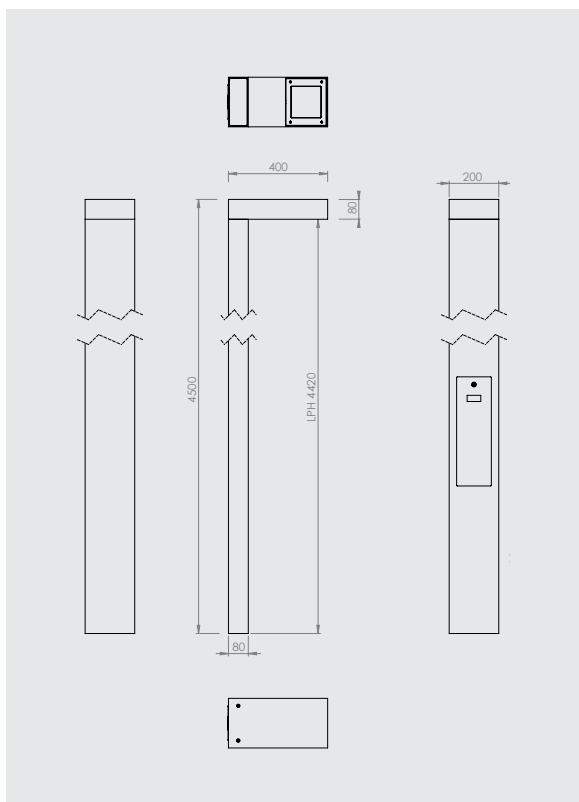

MATERIAL

- Housing: aluminium profile 200*80mm
- Bottom cover: clear PMMA

- ☐ Surfaces painted
- ☒ DB703
- ☒ DB702
- ☒ DB701
- ☐ Other colors upon request

TECHNICAL DATA

- LED Module BLK4-3/4/8C or S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering Index: CRI > 80 at 2700K | 3000K | 4000K
CRI > 70 at 1800K | 2200K
- Power rating: 15 - 33W
- Rated luminous flux for 3000K
BLK4-3C (rectangular): 1833 - 4398 Lumen
BLK4-4C (asym. wide): 1690 - 4056 Lumen
BLK4-8C (asym. forward): 1499 - 3599 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- separate earth section with cable junction box
- Pole tube for mounting height = approx. 2,40 - 4,50m, suitable for earth piece and Flange plate
Other heights on request

STANDARDS

⊕ | □ | CE | Housing IP65 | LED Module IP67

CONSTRUCTION OPTIONS

B

LIGHT SPOTS

1b

