


MASTLEUCHTE

PLANEA MINI² LS

BERGMEISTER
LEUCHTEN

■ P R
O D U
K T E

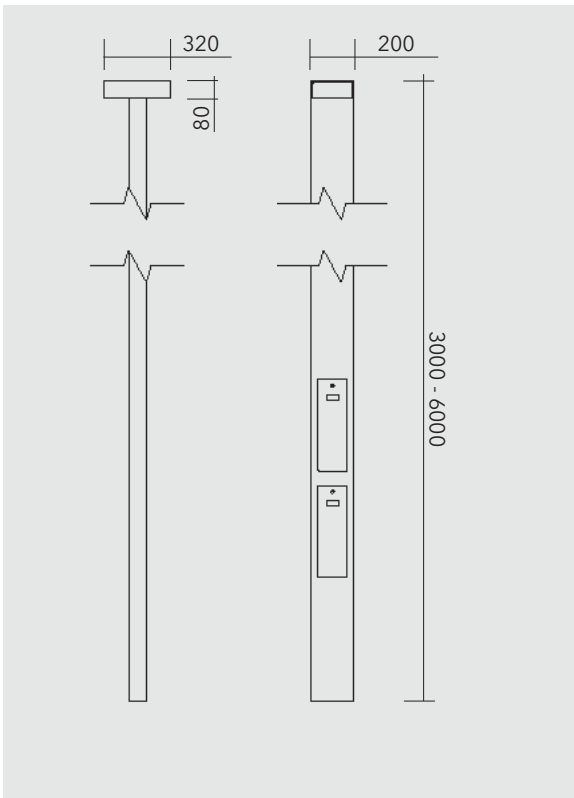

MATERIAL

- Housing: aluminium profile 320*200*80mm
- Bottom cover: clear PMMA

Surface painted:

- DB 703
- DB 702S
- DB 701
- Other colours on request

TECHNICAL DATA

- LED module type 2xBLK2-3/4/5/7/8C or S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering index: CRI>80 at 2700K | 3000K | 4000K
CRI>70 at 1800 | 2200K
- Power rating per bracket: 6,7 - 17,5W
- Rated luminous flux for 3000K:
per bracket with 8,7W (250mA)/10,5W (350mA)/ 14,7W (500mA):

BLK2-3C BLC (asym-extra-wide BLC):	490/ 858/ 1226lm
BLK2-4C (asym-extra-wide-P_4):	541/ 946/ 1352lm
BLK2-5C (asym-extra-wide-P):	533/ 933/ 1333lm
BLK2-7C (asym-wide-M):	556/ 973/ 1390lm
BLK2-8C (asym. forward):	1200/ 2099 / 2999lm

- EVG: LED constant driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- separate earth section with cable junction box
- Pole tube for mounting height: = approx. 2,90 - 5,90m, suitable for earth piece and flange plate
other heights on request

STANDARDS

⊕ | ☐ | CE | Housing IP65 | LED module IP67

CONSTRUCTION OPTIONS



A

LIGHT SPOTS



2