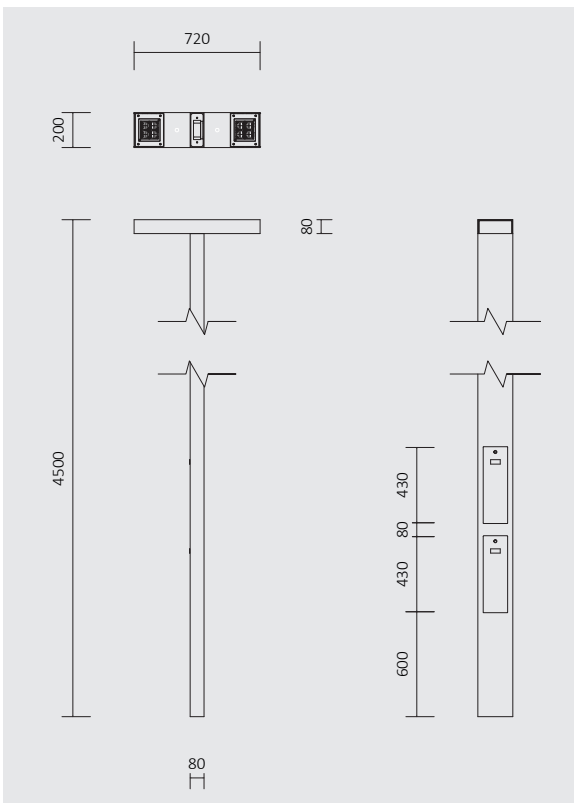
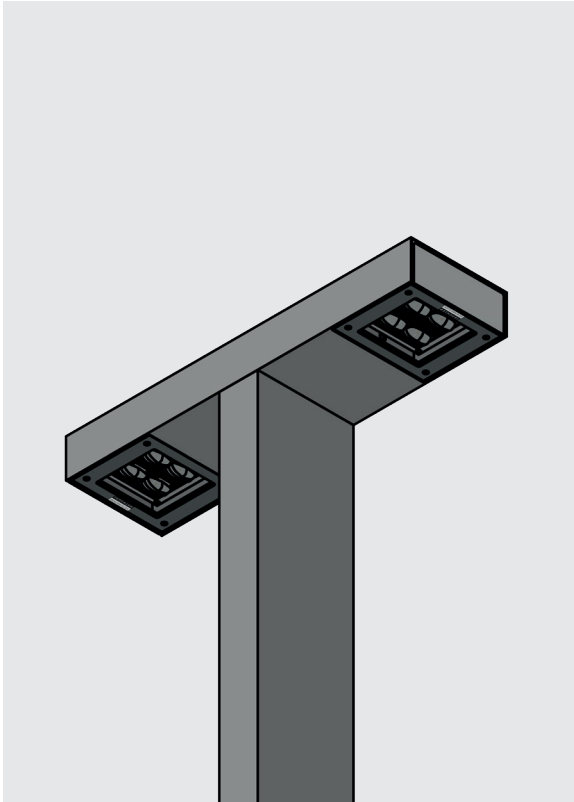


PLANEA MIDI² LS

MATERIAL

- Housing: aluminium profile 720*200*80mm
- Bottom cover: clear PMMA

Surfaces painted

- DB703
- DB702
- DB701
- Other colours on request

TECHNICAL DATA

- LED module per bracket: Type BLK4-3/4/8C or S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering Index: CRI > 80 at 2700K | 3000K | 4000K
CRI > 70 at 1800K | 2200K
- Power rating per bracket: 15 - 33W
- Luminous flux per bracket for 3000K
BLK4-3C (rectangular): 1833 - 4398 Lumen
BLK4-4C (asym. wide): 1690 - 4056 Lumen
BLK4-8C (asym. forward): 1499 - 3599 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- separate earth section with cable junction box
- Pole tube for mounting height = approx. ca. 2,90 -5,90m, suitable for earth piece and flange plate
other heights on request

STANDARDS

⊕ | □ | CE | Housing IP65 | LED Module IP67

CONSTRUCTION OPTIONS



A

LIGHT SPOTS



2

