


CANNA 200 LS

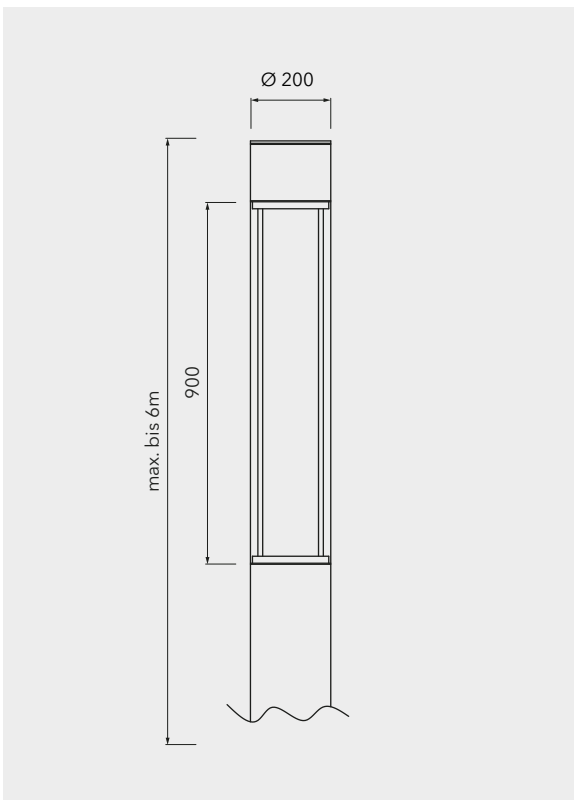

MATERIAL

- Housing: aluminium, Ø 200 mm | optional: Steel, hot-dip galvanised
- Luminaire glass made of PMMA clear

○ Surface lacquered:

● DB703

● DB702S

● DB701

○ Other colours on request

TECHNICAL DATA

- LED module BLK4-4/5/6/7/8S
- Optics made of PMMA, satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Power rating: 19 - 37W
- Rated luminous flux for 3000K:
 - BLK4-5S (asym. wide): 1873 - 3320 Lumen
 - BLK4-6S (sym. wide): 1927 - 3415 Lumen
 - BLK4-7S (asym. wide): 1823 - 3232 Lumen
 - BLK4-8S (asym. forward): 1760 - 3379 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- separate column base with ground piece or flange plate
- LPH = approx. 2,90m - 7,90m
- socket/plug for Christmas lighting, terminal box,
- on top: Zhaga Book 18 interface, PIR-Sensor, save controller

STANDARDS

⊕ | □ | CE | Housing IP65 | LED module IP67

CONSTRUCTION OPTIONS



LIGHT SPOTS

1a ⊙

