


CANNA 230 LS

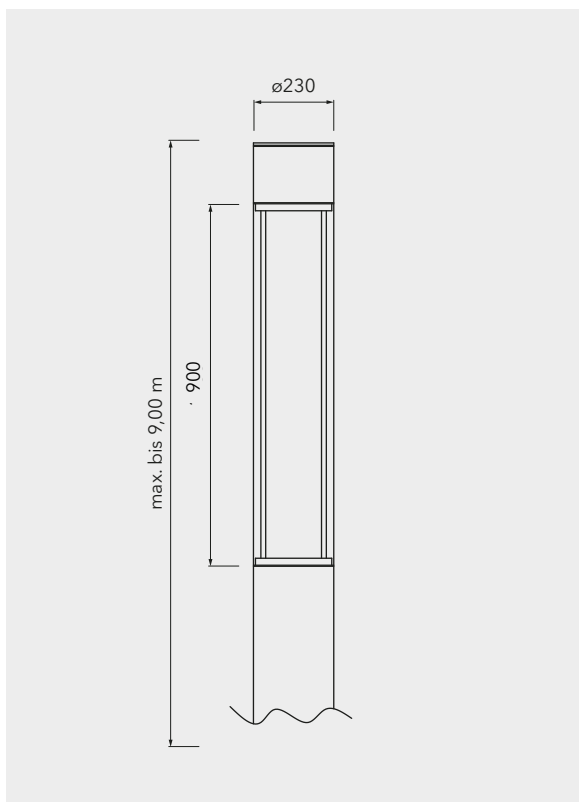

MATERIAL

- Housing: aluminium, Ø 230 mm | optional: Steel, hot-dip galvanised
- Luminaire glass made of PMMA clear

○ Surface lacquered:

- DB703
- DB702S
- DB701
- Other colours on request

TECHNICAL DATA

- LED module BLK6-3/5/6/8S
- Optics made of PMMA, satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Power rating: 27-51W
- Rated luminous flux for 3000K:

BLK6-3S (asym. wide):	3394 - 6014 Lumen
BLK6-5S (asym. wide):	3206 - 5682 Lumen
BLK6-6S (sym. wide):	3166 - 5610 Lumen
BLK6-8S (asym. forward):	2890 - 5122 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- separate column base with ground piece or flange plate
- LPH = approx. 6,00 - 9,00m
- socket/plug for Christmas lighting, terminal box, on top: Zhan-Book 18 interface, PIR-Sensor, save controller

STANDARDS

⊕ | ☐ | CE | Housing IP65 | LED module IP67

CONSTRUCTION OPTIONS

A

LIGHT SPOTS

1a

