


CANNA SL 200

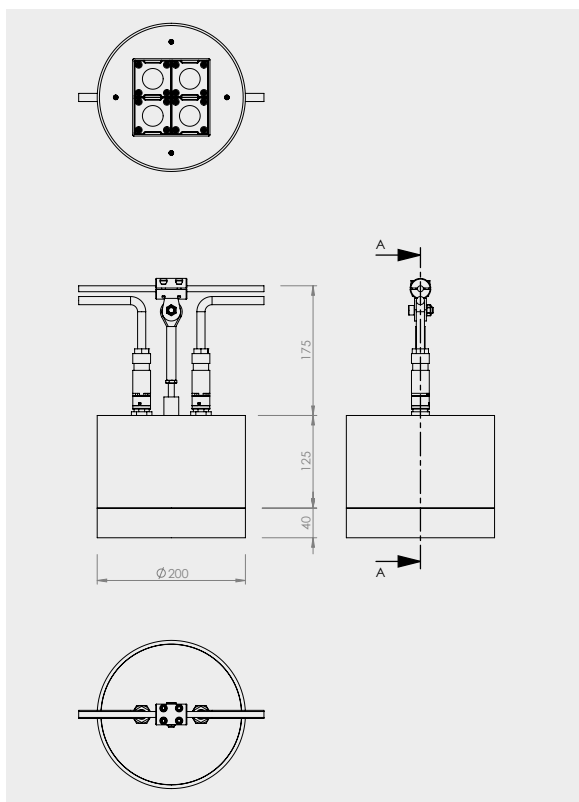

MATERIAL

- housing: painted aluminum Ø 200 mm
- Diffuser Ø 200 mm PMMA clear; optionally satinised or painted in housing colour
- Surfaces lacquered
- DB703
- DB 702
- DB 701
- Other colours upon request

TECHNICAL DATA

- LED module BLK4-1/3/5/6/7/8c or s
- Optics of PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering Index: CRI > 80 (2700K | 3000K | 4000K)
CRI > 70 (1800K | 2200K)
- Power rating: 11,4 - 35,4W
- Rated luminous flux of LED-Module:

BLK4-1S (spot):	1159 - 4058 lm
BLK4-3S (rectangular):	1143 - 4010 lm
BLK4-5S (asym-wide-P):	1117 - 3908 lm
BLK4-6S (sym-wide):	1093 - 3824 lm
BLK4-7S (asym-wide-M):	1067 - 3734 lm
BLK4-8S (asym-forward):	1004 - 3514 lm
- ECG: OSRAM OT40 4DIM (AstroDim, 1-10V)
Reducer circuit (StepDim)
- Weight (incl. suspension): 4.5 kg

ACCESSORIES

- Christmas plug, light control

STANDARDS

⊕ | ☐ | CE | Housing IP44 | LED-Module IP67

CONSTRUCTION OPTIONS



LIGHTING SPOTS

1a ○





CATENARY LUMINAIRE

CANNA SL 200

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

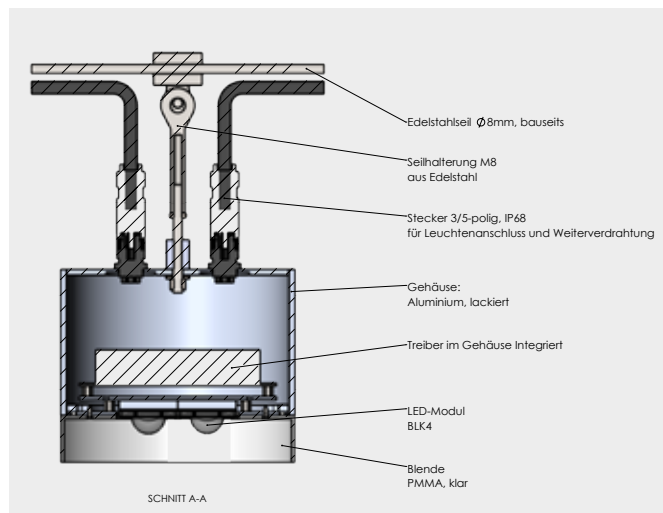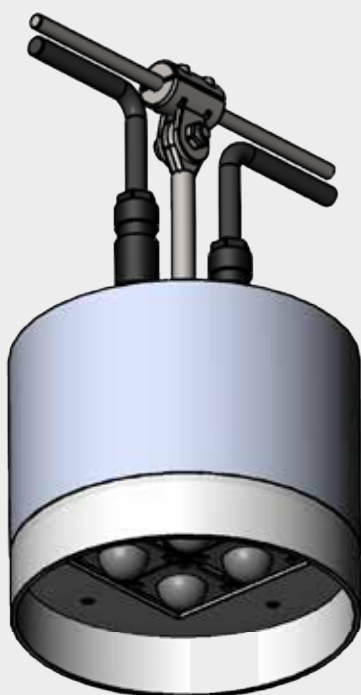

LUMINAIRE
Canna SL 200

VISUALISATION ON THE LEFT
**Perspective with rope bracket, view
from top, from bottom**

VISUALISATION ON THE RIGHT
Schematic section A-A