


CANNA 250 SL

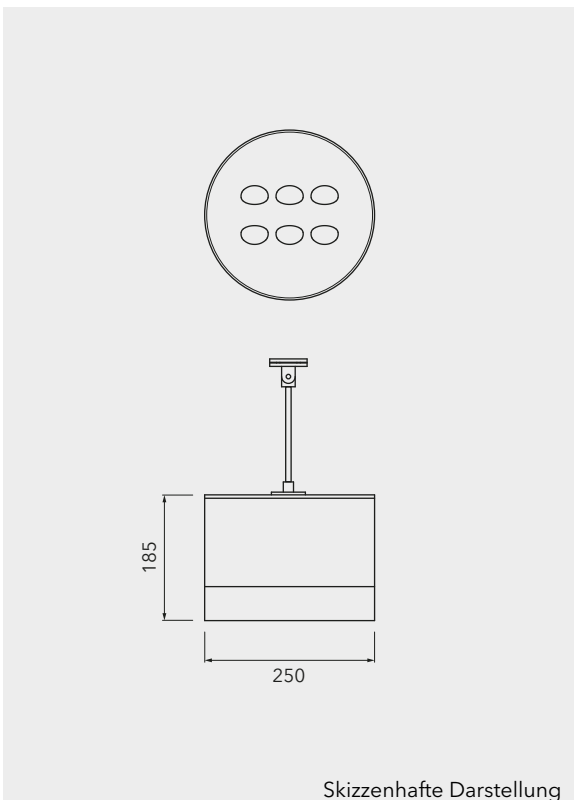

MATERIAL

- Housing: aluminium Ø 250 mm
- Diffuser Ø 250 mm PMMA clear;

- Oberflächen lacquered:
- DB703
- DB702
- DB701
- ☉ Other colours on request

TECHNICAL DATA

- LED modul BLK6-1/3/5/6/8C or S
- Optics of PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering Index: CRI> 80 (2700K | 3000K | 4000K)
CRI> 70 (1800K | 2200K)
- Power rating: 27 - 52W
- Rated luminous flux for 3000K:

BLK6-3S (rectangular):	3000 - 6000 Lumen
BLK6-5S (asym. wide):	2932 - 5864Lumen
BLK6-6S (sym. wide):	2869 - 5738Lumen
BLK6-8S (asym. forward):	2636 - 5272 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- Christmas plug, light control, cable pendant or pendant rod made of V2A

STANDARDS

⊕ | □ | CE | Housing IP54 | LED module IP66

CONSTRUCTION OPTIONS



LIGHT POINT

1a ⊕




CATENARY LUMINAIRE

CANNA 250 SL

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

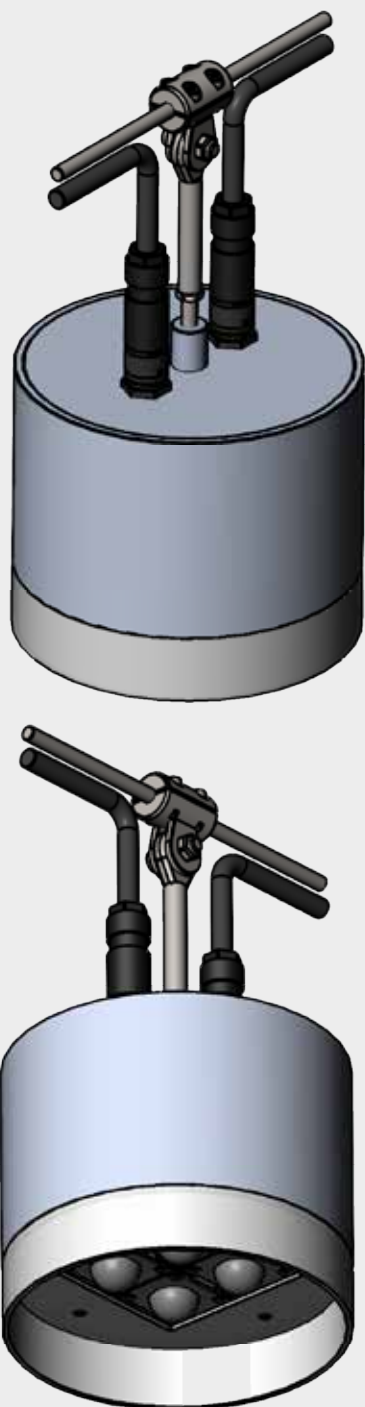

LUMINAIRE
Illustration Canna SL 200,
cable suspension for Canna SL250 identical

ILLUSTRATION
Perspective view with rope healing, top view,
bottom view for Canna SL 200