


POLE LUMINAIRE

# PLANEA MINI LS

BERGMEISTER  
LEUCHTEN

■ P R  
O D U  
K T E

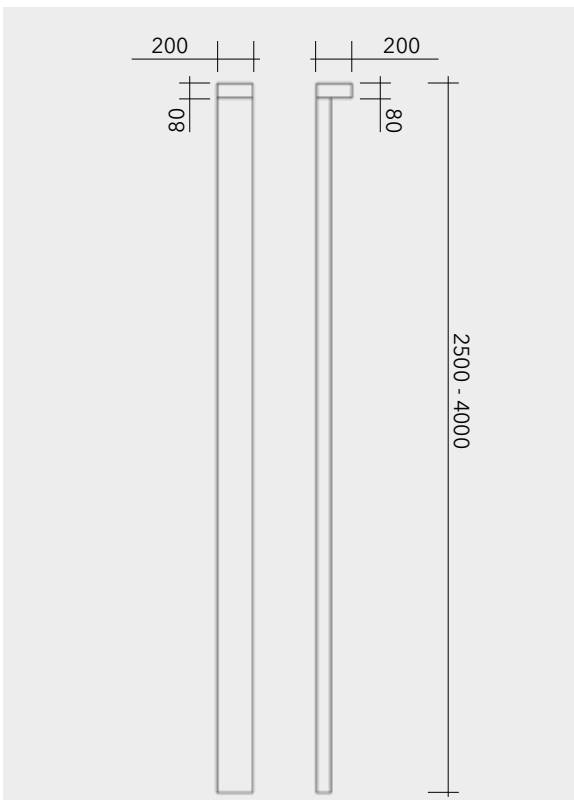

## MATERIAL

- Housing: aluminium profile 200\*80mm
- Bottom cover: clear PMMA

- ☐ Surfaces lacquered
- ☒ DB 703
- ☐ DB 702
- ☐ DB 701
- ☐ Other colours available on request

## TECHNICAL DATA

- LED module BLK2-4/8C or S
- Optics: PMMA, clear
- Colour temperature : 2200K | 2700K | 3000K  
optional: 1800K | 4000K
- Colour rendering index: CRI > 80 at 2700K | 2700K | 3000K  
CRI > 70 at 1800K | 4000K
- Power rating: 11- 15W
- Luminaire luminous flux for 3000K:  
BLK2-4C (asym. wide): 971 - 1334 lm  
BLK2-8C (asym. forward): 831 - 1142 lm
- ECG: LED constant current driver (AstroDim, 1-10V)  
optional: DALI + DC-compatible, reduction circuit (StepDim)

## ACCESSORIES

- separate earth section with cable junction box
- Pole tube for mounting height = approx. 2,40 - 3,90m, suitable for earth piece and Flange plate  
Other heights on request

## STANDARDS

⊕ | □ | CE | Housing IP65 | LED-Module IP67

## CONSTRUCTION OPTIONS

A

## LIGHT SPOTS

1a

