
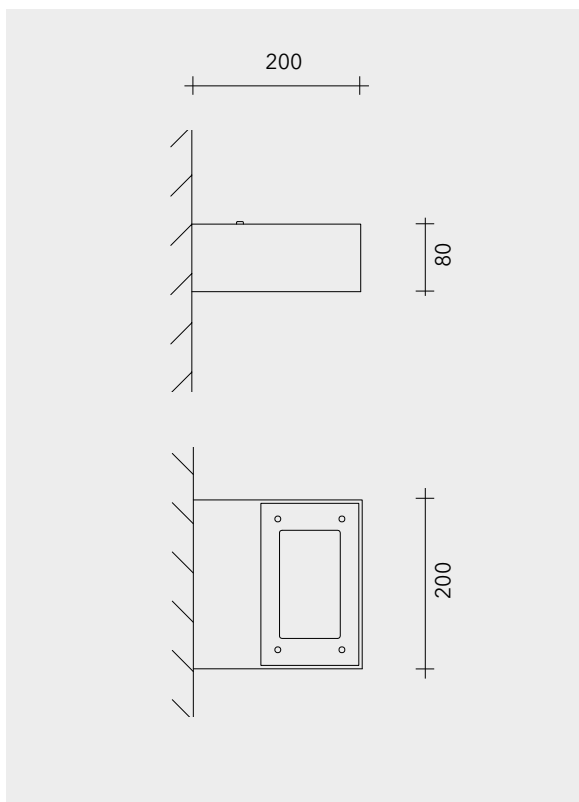


PLANEA MINI WL

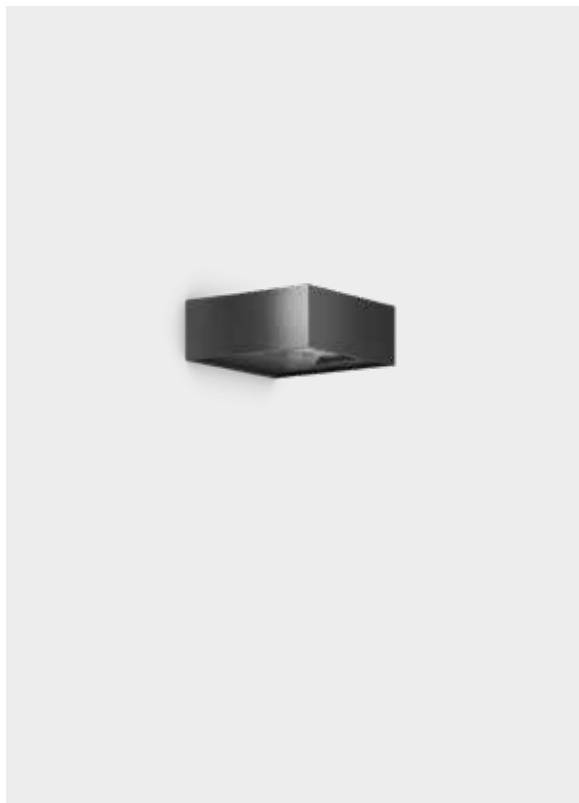

MATERIAL

- Housing: aluminium profil 200*80mm
- Bottom cover: clear PMMA

Surface lacquered:

- DB 703
- DB 702
- DB 701
- ☉ Other colours on request

TECHNICAL DATA

- LED module BLK2-3/4/5/8C oder S
- Optics: PMMA, clear or satinised
- Colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering Index: CRI > 80 at 2700K | 3000K | 4000K
CRI > 70 at 1800K | 2200K
- Power rating: 7,7/10,5/14,5W
- Rated luminous flux for 3000K
für BLK2 mit 7,7W (250mA)/ 10,5W (350mA)/ 14,5W (500mA)
BLK2-3C (rectangular): 733/ 1026/ 1466lm
BLK2-4C (asym-wide-P_4): 676/ 946/ 1352lm
BLK2-8C (asym-forward): 600/ 840/ 1200lm
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)

ACCESSORIES

- Stainless steel wall bracket
- optional: Bracket for mounting at Planea Maxi LS

STANDARDS

⊕ | □ | CE | Housing IP65 | LED module IP67

CONSTRUCTION OPTIONS

C

LIGHT SPOTS

1b



WALL LUMINAIRE

PLANEA MINI WL

BERGMEISTER
LEUCHTEN

■ P R
O D U
K T E



Picture 1: Perspective bottom view

Picture 2: Top view

Picture 3: Bottom view