


POLE- AND WALL LUMINAIRE

CANNA 200 ML

BERGMEISTER
LEUCHTEN

■ P R
O D U
C T S

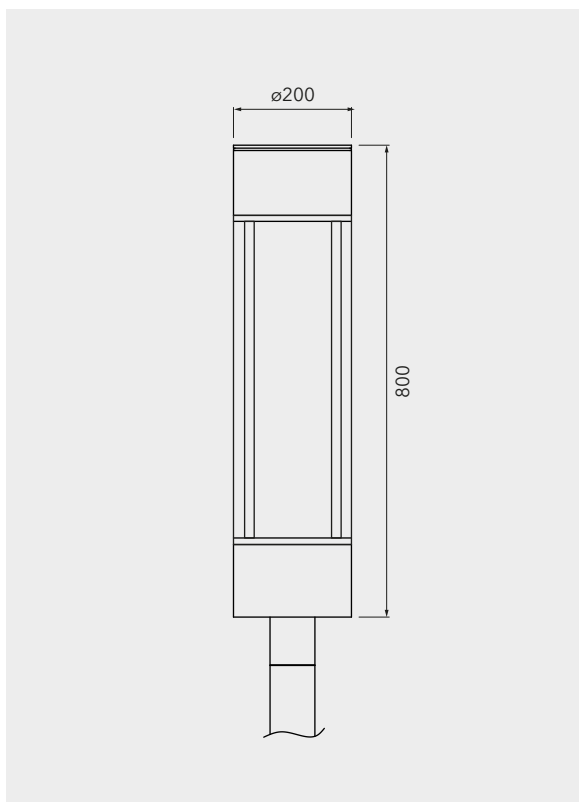

MATERIAL

- Housing: aluminium, Ø 200 mm
- Luminaire glass made of PMMA, clear

- Surface lacquered:
 - DB703
 - DB702
 - DB701
- Other colours on request

TECHNICAL DATA

- LED module BLK4-4/5/6/7/8S
- Optics made of PMMA, satinised
- colour temperature: 2200K | 2700K | 3000K
optional: 1800K | 4000K
- Colour rendering index: CRI > 80 bei 2700K | 3000K | 4000K
CRI > 70 bei 1800K | 2200K
- Power rating: 19 - 37W
- Rated luminous flux for 3000K:
 - BLK4-5S (asym. wide): 1873 - 3320 Lumen
 - BLK4-6S (sym. wide): 1927 - 3415 Lumen
 - BLK4-7S (asym. wide): 1823 - 3232 Lumen
 - BLK4-8S (asym. forward): 1760 - 3379 Lumen
- ECG: LED constant current driver (AstroDim, 1-10V)
optional: DALI + DC-compatible, reduction circuit (StepDim)
- Impact resistance: IK09

ACCESSORIES

- Pole till LPH = 5,00 m
- Christmas plug, cable box, light control
- Reducer for mounting on mast top section

STANDARDS

⊕ | □ | CE | Housing IP65 | LED module IP67

CONSTRUCTION OPTIONS



LIGHT SPOTS

